


Drilling Blowout Prevention Systems

Class VI

(For Wells not exceeding a depth of 19,000m)

(Minimum Pressure Rating 105,000 kPa)

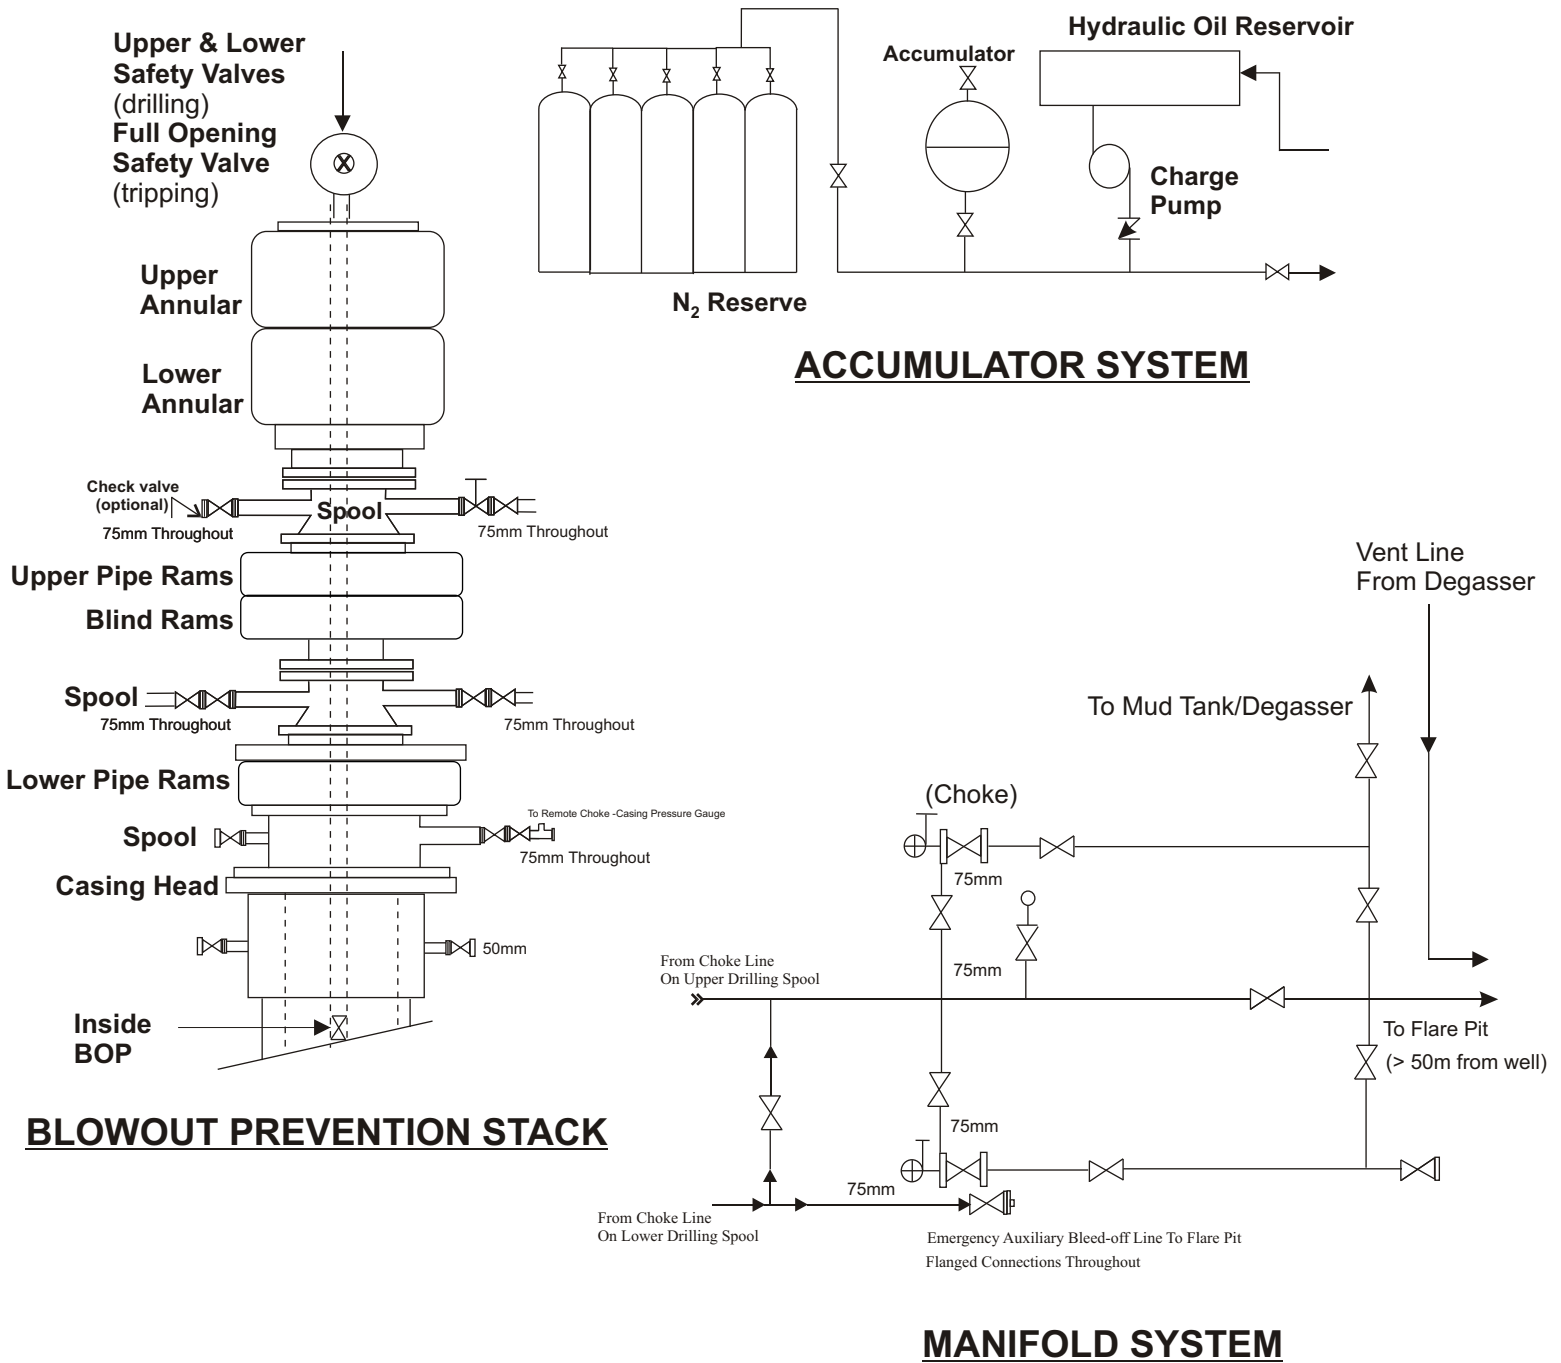

Note:

1. Kill and bleed-off systems 75mm minimum nominal diameter throughout.
2. Flanged pipe connections from the drilling spool to the last valve on the manifold, inclusive.
3. Hydraulic and manual valve positions on bleed-off lines are interchangeable.